

## Spectroscopical device in a confocal microscope

**Patent number:** EP1178345

**Publication date:** 2002-02-06

**Inventor:** KNEBEL WERNER DR (DE)

**Applicant:** LEICA MICROSYSTEMS (DE)

**Classification:**

**- international:** **G01J3/14; G01J3/32; G02B21/00; G01J3/12; G01J3/30; G02B21/00;** (IPC1-7): G02B21/00; G01J3/32

**- european:** G01J3/14; G01J3/32; G02B21/00M4A5M; G02B21/00M4A7M; G02B21/00M4A9

**Application number:** EP20010117981 20010725

**Priority number(s):** DE20001038049 20000802

**Also published as:**

US6809815 (B2)  
US2002021440 (A1)  
JP2002122787 (A)  
DE10038049 (A1)  
EP1178345 (B1)


**Cited documents:**

US5192980  
US5329352  
DE4330347  
EP0548830  
DE19835072  
more >>

[Report a data error here](#)

### Abstract of EP1178345

Optical arrangement for selection and detection of the light from a spectral region of a light beam (1) in a confocal raster microscope with a prism (2) for spectral separation of the light beam and a shutter (3) for selection of a particular spectral region (4). To effect the spectral region (4) of the spectrally divided light beam (19), it and the detector device can be moved relative to each other. Relative displacement of the spectral region of the light beam and the detector is achieved using a galvanometer for rotational or translational displacement.

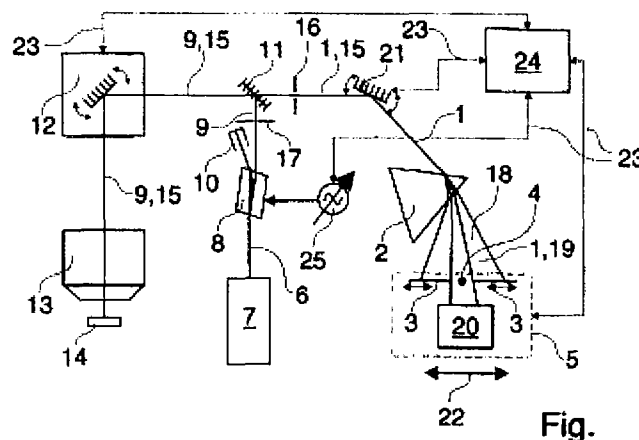

Data supplied from the **esp@cenet** database - Worldwide